



INSTRUCTIONS FOR RING REMOVAL

RingSplitter^{TM/MD} (PART NO : 1590099)

INSTRUCTION SHEET
1/2" TO 1" RING SPLITTER TOOL

¥ Cut pipe close to end of fitting with tube cutter, be careful not to damage fitting.

¥ Locate the ring on the pipe in the center of the cutting blade. fig 1

¥ Close tool to cut ring. fig 2

¥ Open tool and rotate tool or pipe/fitting 180° and cut ring a second time. fig 3

¥ Pry the remaining portions of the cut crimp ring off the pipe if necessary. **DO NOT USE THE BLADE TO PRY. BREAKAGE OF THE BLADE CAN RESULT.**

¥ Pry the pipe off the insert fitting and cut the pipe 1/2" minimum beyond the damaged area prior to re-crimping.

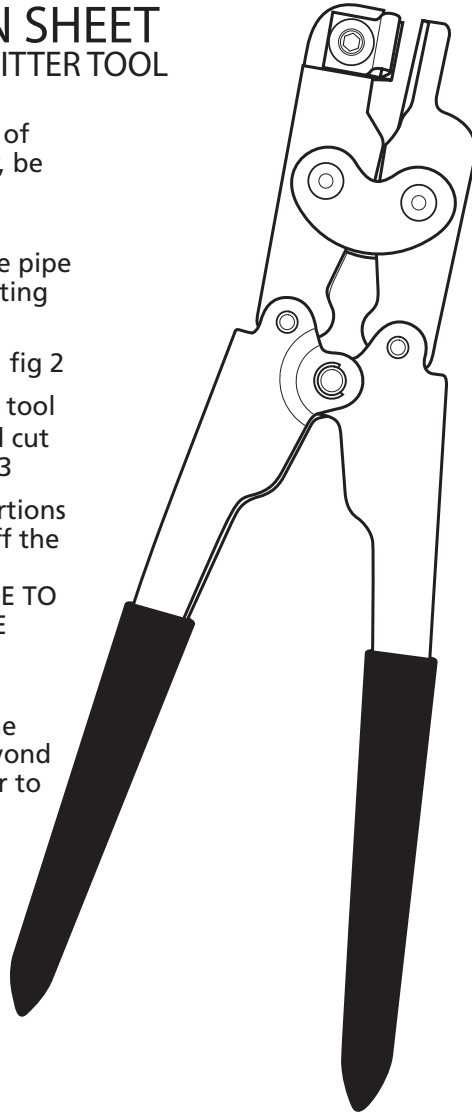


fig 1

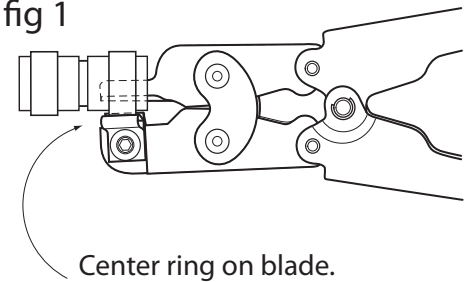


fig 2


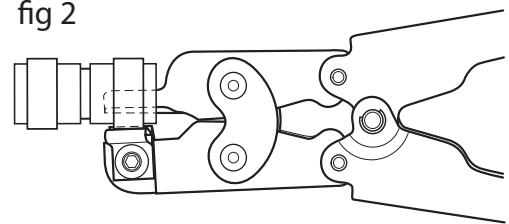


fig 3

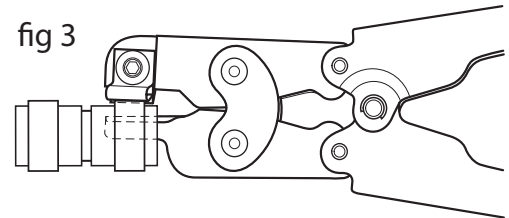

CAUTION: WEAR SAFETY GLASSES DURING TOOL USE TO PREVENT EYE INJURY. HOLD RING DURING SECOND CUT TO PREVENT LOOSE PARTS FROM IMPACTING YOURSELF OR OTHERS.